



RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN


·材质及电镀(Material)
 焊针(Pin header): 黄铜, 镀锡(Brass, Tin plated)
 塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 8A
 接触电阻(Contact Resistance): 20mΩ
 绝缘电阻(Insulation Resistance): 5000MΩ/1000V
 耐电压(Withstanding Voltage): AC1500V/1Min

·机械性能(Mechanical)
 温度范围(Temperature Range): -40℃ ~ +105℃
 瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)

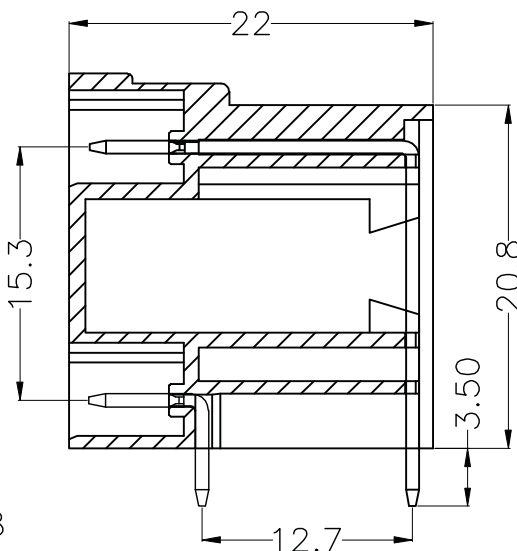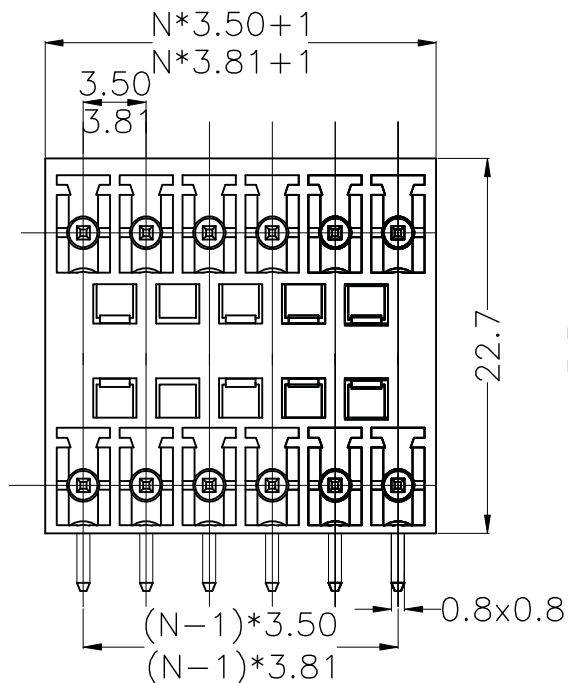

订购方式/HOW TO ORDER

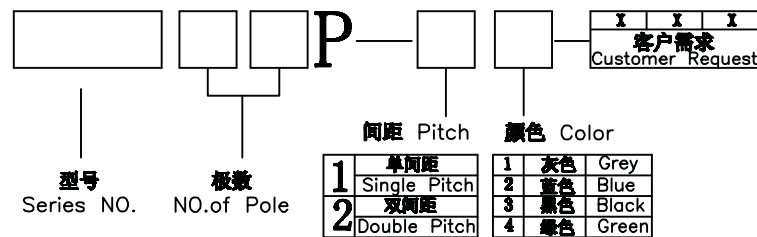

Contact Us

TEL: +86 - 574 - 63510149 FAX: +86 - 574 - 63516735
 E-Mail: Sales@cxsuteng.com Website: www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE			慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD						
X.	±0.25	X*.	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST15EDGRH-3.5/3.81
.X	±0.20	.X*.	±2°	角法 VIEW	第三角投影	设计 DESIGN	No.06	产品料号 PART NO.	ST15EDGRH-3.5/3.81
.XX	±0.15	.XX*.	±1°	比例 SCALS	1:1	审核 CHKD		图号 DRAW NO.	ST15EDGRH-3.5/3.81
.XXX	±0.02	.XXX*.	±0.5°	版本 VER	AO	核准 APPD			ST15EDGRH-3.5/3.81
日期 DATE	2012.07.10								

N=No.of contacts