




RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



SPECIFICATION

MATERIAL



Housing: PA66, UL94V-0
 Screw: M2 Steel, Zinc Plated
 Terminal: Phosphor Bronze, Tin Plated
 Clamp: Brass, Ni Plated

ELECTRICAL



Rated voltage: 300V
 Rated current: 8A
 Wire Range (AWG/MM²): 28-16AWG/0.5-1.5MM²
 Withstanding voltage: AC2000V/1Min

MECHANICAL

Torque: 0.2Nm (1.7Lb-In.)
 Strip Length: 7mm
 Operating Temperature: -40°C~+105°C

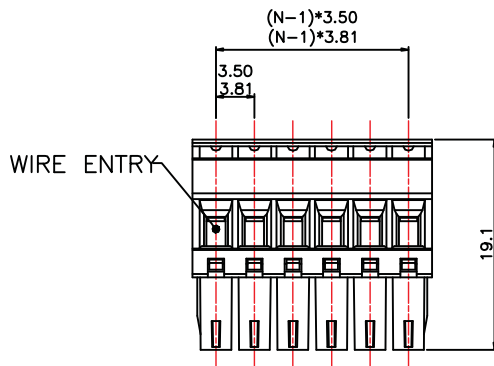

订购方式/HOW TO ORDER

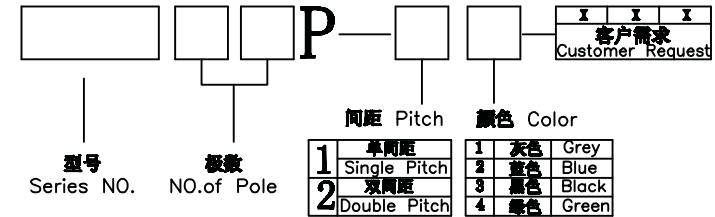

N=No. of contacts

Contact Us

TEL: +86 - 574 - 63510149

FAX: +86 - 574 - 63516735

E-Mail: Sales@cxsuteng.com

Website: www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST15EDGKA-3.50/3.81
.X	±0.20	.X°	±2°	角法 VIEW	第三角	设计 DESIGN	No.06	产品料号 PART NO.	ST15EDGKA-3.50/3.81
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	ST15EDGKA-3.50/3.81
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 APPD	A0		