

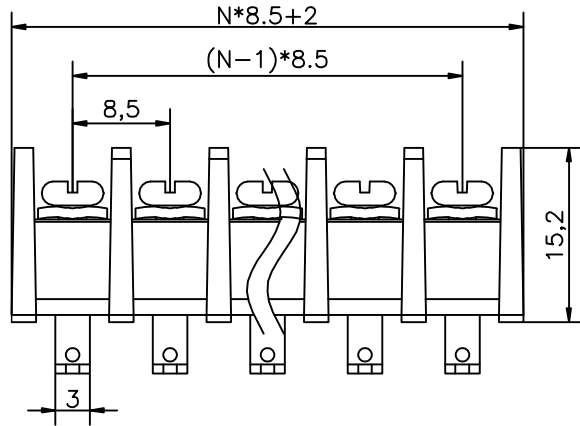


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

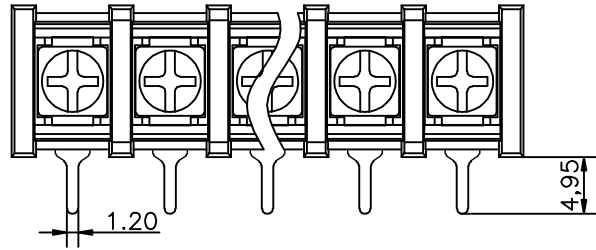

**·材质及电镀(Material)**

塑件(Housing): PA66, UL94V-0  
 端子(Terminal): 黄铜, 0.8t 镀锡(Brass, Tin plated)  
 螺丝(Screw): M3, 钢, 镀镍(Steel, Ni-Plated)


**·电气性能(Electrical)**

额定电压(Rated Voltage): 300V  
 额定电流(Rated Current): 20A  
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V  
 耐电压(Withstanding Voltage): AC2000V/Min

**·机械性能(Mechanical)**

温度范围(Temperature Range): -40℃~ +105℃  
 适用线径(Wire Range): 22-14AWG  
 最大扭矩值(Max. Torque Value): 0.5N.m 4.4Lb.in

**订购方式/HOW TO ORDER**

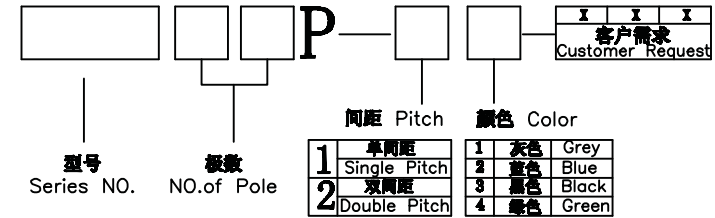

**Contact Us**

TEL: +86 - 574 - 63510149

FAX: +86 - 574 - 63516735

E-Mail: Sales@cxsuteng.com

Website: www.cxsuteng.com

N=No. of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST35R-8.50
.X	±0.20	.X°	±2°	角法 VIEW	第一角	设计 DESIGN	No.06		
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST35R-8.50
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 APPD	AO	图号 DRAW NO.	ST35R-8.50