



RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

- 材质及电镀(Material)  
焊针(Pin header):黄铜,镀锡(Brass, Tin plated)  
塑件(Housing): PBT, UL94V-0
- 电气性能(Electrical)  
额定电压(Rated Voltage): 300V  
额定电流(Rated Current): 16A  
接触电阻(Contact Resistance): 20mΩ  
绝缘电阻(Insulation Resistance): 5000MΩ/1000V  
耐电压(Withstanding Voltage): AC1500V/1Min
- 机械性能(Mechanical)  
温度范围(Temperature Range): -40℃~ +105℃  
瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)

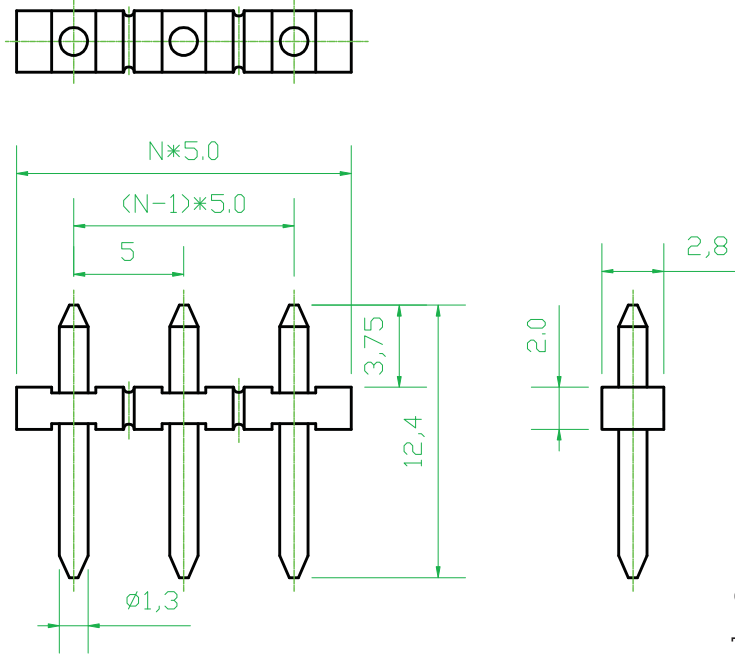

### 订购方式/HOW TO ORDER

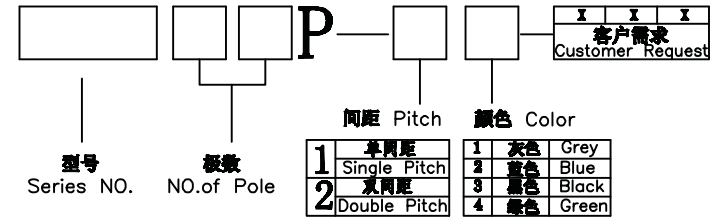

### Contact Us

TEL: +86 - 574 - 63510149      FAX: +86 - 574 - 63516735  
E-Mail: Sales@cxsuteng.com      Website: www.cxsuteng.com

N = No. of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST332J-5.0
.X	±0.20	.X°	±2°	角法 VIEW	⊕	设计 DESIGN	No.06	产品料号 PART NO.	ST332J-5.0
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	ST332J-5.0
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012. 07. 10	版本 APPD	AO		