
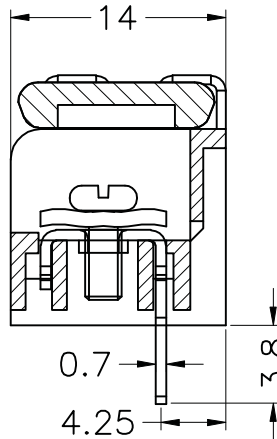
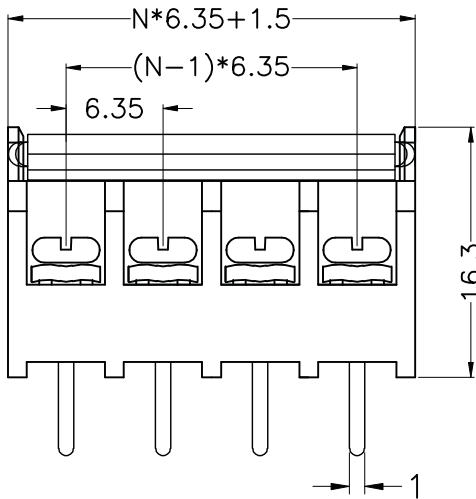


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

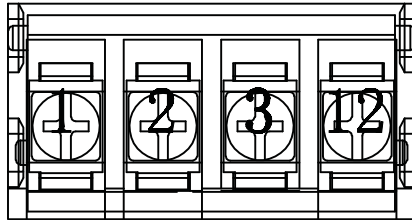


·材质及电镀(Material)
 塑件(Housing): PA66, UL94V-0
 端子(Terminal): 黄铜, 0.7t 镀锡(Brass, Tin plated)
 螺丝(Screw): M3, 钢, 镀锌(Steel, Ni-Plated)

·电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 16A
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V
 耐电压(Withstanding Voltage): AC2000V/Min

·机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~+105℃
 适用径(Wire Range): 22-14AWG
 最大扭矩值(Max.Torque Value): 0.5N.m 4.4Lb.in

订购方式/HOW TO ORDER

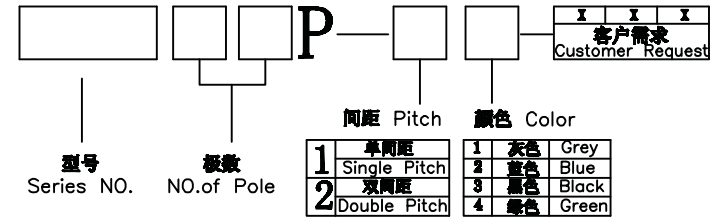

Contact Us

TEL: +86 - 574 - 63510149 FAX: +86 - 574 - 63516735
 E-Mail: Sales@cxsuteng.com Website: www.cxsuteng.com

N=No. of contacts

公差一览表				SUTOWN 慈溪市速腾电子有限公司			
TOLERANCE UNLESS OTHERWISE				CIXI SUTENG ELECTRONIC CO., LTD			
X.	±0.25	X°	±5°	单位	mm	制图	No.01
.X	±0.20	.X°	±2°	角法	第一角法	设计	产品名称
.XX	±0.15	.XX°	±1°	视图	第一角法	审核	图号
.XXX	±0.02	.XXX°	±0.5°	比例	1:1	批准	产品料号
日期	2012.07.10	版本	A0	标准	按标准	审核	图号
DATE	2012.07.10	VER	A0	APPD		APPD	DRAW NO.

STHB635G-6.35
 STHB635G-6.35
 STHB635G-6.35